


Full Mesh IP Network Solution Hubless Enterprise Grade Satellite Solution

The VSATPlus 3 terminal provides a full mesh communications solution, optimized for IP traffic, supporting multi service traffic for service providers, governments and corporations.

VSATPlus 3 is PolarSat's fourth-generation advanced satellite communications terminal. Building upon PolarSat's proven track record of field-deployed, reliable communications products, this latest product introduces many new features and enhancements to address the seamless integration to terrestrial IP based networks.

VSATPlus 3 networks enable customers to easily and quickly deploy advanced communications networks that are economical to own and operate and are highly scalable to accommodate growth. As well, the architecture is robust and upgradeable, thus providing a future-proof solution for the customer.

The VSATPlus 3 provides full mesh, single hop connectivity within a satellite network leveraging PolarSat's recognized expertise in MF-TDMA systems. This platform enables a robust mix of user services, ranging from toll-quality voice, email and file transfers to broadband applications such as internet access, IP video, LAN Interconnect, and Client Server applications.

PolarSat's VSATPlus 3 terminal incorporates state-of-the-art features to provide the customer with the most powerful product on the market today in terms of data throughput, connectivity, flexibility and satellite efficiency. The terminal provides a direct Ethernet port to a users LAN and hosts an IP router which includes vital IP enhancements for satellite transport.

With its ability to support data, video, voice and facsimile, the VSATPlus 3 is the ideal low-cost system. It supports a full complement of Internet Protocol (IP) transport applications, all in a single, integrated, fully digital network.

PolarSat's VSATPlus 3 operates in a full mesh network for single-hop terminal-to-terminal connectivity. IP traffic is carried directly from one remote site to another, eliminating the need for a central hub.

Features

- ▶ Direct IP interface supports transport of Toll-quality voice, data, video, client/server and facsimile services combined on a single, low-cost platform
- ▶ Built in IP enhancements to optimize traffic performance over satellite
- ▶ Hubless, full mesh Bandwidth on Demand (BoD) operation with single satellite hop
- ▶ Maximum use of satellite bandwidth by combining Time Divisional Multiple Access (TDMA) and frequency hopping (FHOP) techniques
- ▶ Easily installed and expandable terminal for low-cost network growth
- ▶ Network Management System (NMS) offers sophisticated network control for dynamic Bandwidth-on-Demand (BoD) services
- ▶ Fourth Generation TDMA terminal leverages proven network algorithms utilizing state of the art modem for reliability and satellite efficiency



Markets Served

PTTs & telcos

Private carriers

Government agencies

Corporations including:

Banking and financial institutions

Petroleum and oil exploration

Mining and natural resources

Manufacturing

Construction

Aerospace

Retail

Service industries

Services Supported

Data

IP packet services

Local area networks

Batch file transfer

Client server

High-speed computer data transfer

High-resolution image transfer

Telephony (packet services)

VoIP,

Compressed digital videoconferencing

Applications

Corporate Private Networks

Public Switched Telephone
Networks (PSTN)

Backbone telephony, data, and
videoconferencing networks

Telephony service

Extended or supplemental services

Temporary, emergency, or backup
communication services

Cellular extension

Distance learning

Telemedicine

Internet Access



Network Features

Fully integrated services in a single platform

The VSAT*Plus 3* terminal is based on TDMA with frequency hopping (FHOP). Taking advantage of both time domain and frequency domain access methods, the VSAT*Plus 3* allows users to support multiple services such as data, voice, and videoconferencing in one simple, integrated IP transport platform.

The single VSAT*Plus 3* platform integrates with IP based routing and user equipment allowing for a more reliable, flexible, and economical solution.

Hubless, full mesh operation with single satellite hop. The VSAT*Plus 3* is based on a flexible architecture that supports various network topologies including star, full mesh, hybrid, or any combination of these.

The VSAT*Plus 3* architecture eliminates the need for costly central hub equipment and improves call quality by transferring information over single satellite hops. Transponder bandwidth and power requirements are greatly reduced.

IP Packet Services

PolarSat's IP support provides a powerful and cost-effective solution to corporations, governments, and service providers who need to interconnect locations via a satellite-based backbone. The Ethernet Interface supports industry-standard IP. Corporate users are provided a single transport mechanism that can carry all user traffic such as TCP/IP, UDP/IP, while providing mesh communications among all sites within the network.

Satellite bandwidth is allocated through committed information rate (CIR), excess information rate (EIR), and Quality of Service (QoS) definitions, and optimized using dynamic bandwidth allocation (BoD) techniques, thereby minimizing recurring communications network costs. This approach provides user traffic with guaranteed bandwidth and the ability to request additional bandwidth from the network. VSAT*Plus 3* provides the virtual LAN in the sky with the satellite bandwidth resource shared among all users.

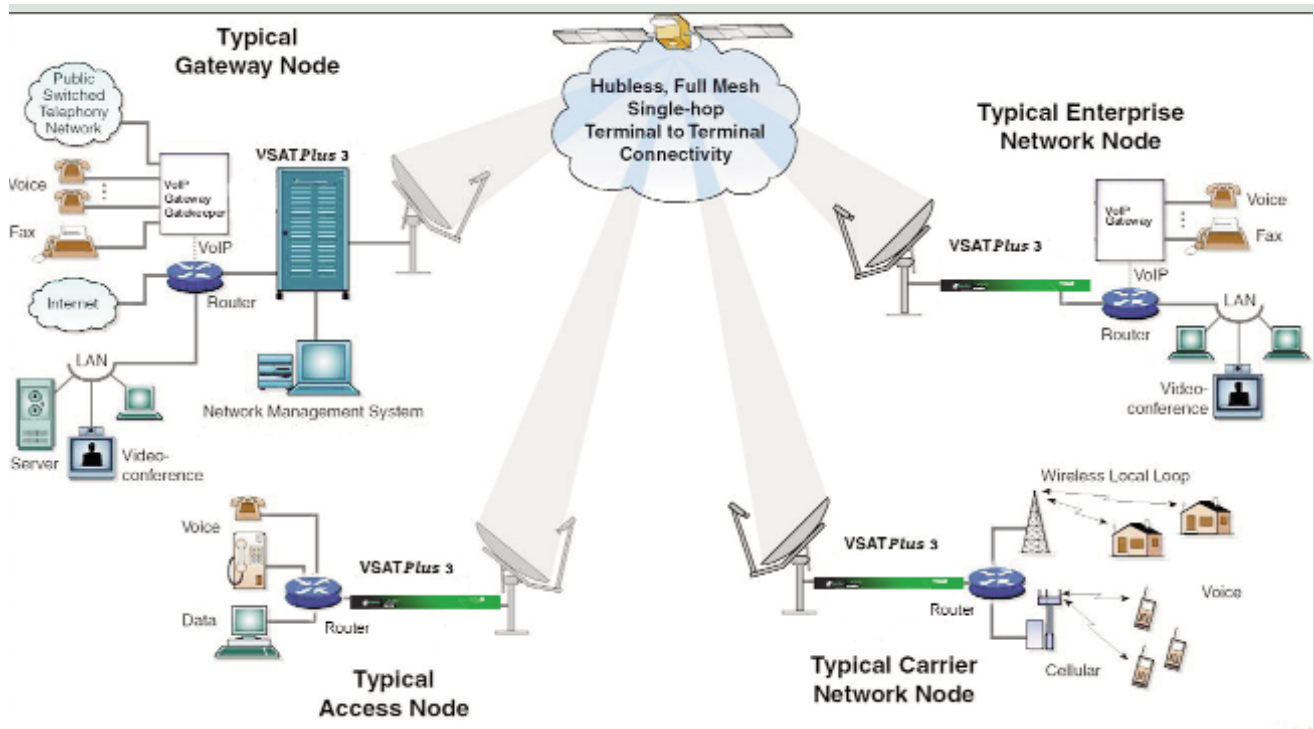


Figure 2 Typical VSATPlus 3 configuration.

Centralized network management

The Network Manager is a key component of the overall NMS and also allows monitoring and controlling of network elements from one central location. This function provides:

- ▶ MIB-based monitor and control of the VSATPlus 3 terminals.
- ▶ Web-based interface to allow ubiquitous access to network information.
- ▶ SNMP support to allow for open-systems integration with other network components.

State Of The Art Satellite Modem

The VSATPlus 3 terminal is based on a software defined modem architecture which provides a flexible variable rate, high speed modem utilizing advanced digital signal processing and advanced time-domain-filtering techniques. The burst modem can be software configured for rates from 338 Kbps up to 6.6 Mbps. Turbo codes provide maximum coding gain with minimum overhead. The RF interface is optionally 70 MHz or L-Band which allows for cost-efficient integration with RF BUCs for typical remote station configurations. The L-band interface provides 10MHz output and 24VDC power for the LNB up the IF cable. An optional 24VDC power supply can be provided for powering Block Up Converters (BUCs) up to 5 Watts.

Carrier (frequency) hopping on up to 32 carriers

The VSATPlus 3 allows network operators to increase transmission capacity up to 32 times, without costly RF and antenna upgrades.

Uplink power control

Uplink power control (UPC) is built into every VSATPlus 3 terminal. VSATPlus 3's unique closed-loop architecture allows for true automatic setting of IF signal strength to compensate for uplink fade.

The VSATPlus 3's UPC function consistently monitors and compensates rain fade to maintain optimum link margin. This provides increased link availability while minimizing the satellite power utilization.

Advanced IP Functionality

The VSATPlus 3 terminal has combined key IP enhancements to overcome the latency effects of satellite communications on TCP/IP protocols. Engineered together these key features work together to deliver superior performance and reduce space segment usage

- ▶ Quality of Service (QoS) supports multiple application class settings and traffic shaping.
- ▶ Performance Enhancement Proxy (PeP) ensures wire-line performance of TCP applications over satellite.
- ▶ IP Compression improves throughput performance over the satellite link.
- ▶ Option: HTTP Prefetch to accelerate web page downloads, thus providing a better user experience.

Every VSATPlus 3 is backed by over 20 years of experience in manufacturing, installing, and maintaining mesh TDMA networks worldwide. Through constant quality improvement, the VSATPlus 3 reaches new levels of reliability, flexibility, operating efficiency, and growth capability. The result is a network solution that meets the most demanding communications requirements now, and well into the future.



Contact Us:

Headquarters
 PolarSat
 549 Meloche
 Dorval, Quebec
 H9P 2W2, CANADA
 Tel: (514) 635-0040
 Fax: (514) 635-0044

China
 Room 1210 Canway Bldg.
 No. 66 Nanlishi Road
 Xicheng District, Beijing
 100045, China
 Tel: (86) 10 68080299
 Fax: (86) 10 68080251



Web: www.polarsat.com
 Email: sales@polarsat.com

VSATPlus 3™ Summary Of Specifications

BASIC FEATURES

- ▶ Satellite IP platform with integrated IP protocol enhancements
- ▶ Full mesh BoD operation with single satellite hop
- ▶ Software-controlled adjustable rate satellite modem
- ▶ Turbo Forward error correction (FEC) code rates of 0.66 and 0.55
- ▶ L-band or 70MHz IF interface options
- ▶ Carrier (frequency) hopping on up to 32 carriers
- ▶ Easy terminal installation and low-cost network expansion
- ▶ Fully automatic acquisition and synchronization operation
- ▶ Operates with C- or Ku-band radio frequency (RF) systems (other bands optional)

NETWORK SERVICES

- ▶ Voice
- ▶ Data
- ▶ Videoconferencing
- ▶ Terrestrial Backup
- ▶ Facsimile
- ▶ LAN interconnect
- ▶ High speed imaging
- ▶ Client-Server connectivity
- ▶ E-mail
- ▶ WAN services
- ▶ ERP services

OPERATING MODES

- ▶ Preassigned (full period)
- ▶ Bandwidth on demand

CUSTOMER (TERRESTRIAL) INTERFACES

- ▶ RJ-45 Ethernet user interface, 10/100BaseT
- ▶ IP multiservice features:
 - ▶ RIP, RIP v2, OSPF, NAT, DHCP Server, IP ToS and DiffServ QoS

MODEM CHARACTERISTICS

- ▶ Satellite Access Technique: Time division multiple access (TDMA) with frequency hopping
- ▶ Information Data Rate Range: 338 kbps to 6.6 Mbps
- ▶ Modulation Type: Quadrature phase shift keying (QPSK)
- ▶ IF Interface

Frequency:	70 MHz	L-Band
	52 to 88 MHz	950 to 1450 MHz
Interface:	BNC connector, 75 Ohm	F type Connector, 75 Ohm
Demod Input Level:	-50 dBm to -26 dBm	-75 dBm to -45 dBm
Mod Output Level:	-26 dBm to -10 dBm	-30 dBm to -5 dBm

WEIGHTS/DIMENSIONS/POWER

Weight (kg/lb)	3.5/8
Height (cm/in)	4.6/1.8
Width (cm/in)	43/16.9
Depth (cm/in)	43/16.9
Input Power (VAC/Hz)	85 to 265 (autoranging)/47-63
Power Consumption (Watts)	50 (Does not include BUC Power requirements)

ENVIRONMENTAL CONDITIONS

	Operating	Non-operating
Temperature	0 to 50°C	-40 to 70°C
Relative Humidity (noncondensing)	0 to 95%	0 to 95%

Bit error rate performance (IF back-to-back modem)

FEC (QPSK/Turbo)

Bit Error Rate	E_b/N_0 (dB)	
	R=0.66	R=0.55
1×10^{-5}	3.6 dB	5.5 dB
1×10^{-6}	3.9 dB	6.0 dB
1×10^{-8}	4.6 dB	6.4 dB